



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>C21B 11/00, 11/08, 13/00, 13/10, C22B 5/00</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 00/01854</b> (43) International Publication Date: 13 January 2000 (13.01.00)</p>
<p>(21) International Application Number: PCT/AU99/00537 (22) International Filing Date: 1 July 1999 (01.07.99) (30) Priority Data: PP 4425 1 July 1998 (01.07.98) AU (71) Applicant (for all designated States except US): TECHNOLOGICAL RESOURCES PTY. LTD. [AU/AU]; 55 Collins Street, Melbourne, VIC 3000 (AU). (71) Applicant (for US only): WEBER, Margot (legal representative of the deceased inventor) [DE/BR]; Rua Campo Belo, CEP-300 Laranjeiras, RJ (BR). (72) Inventor: WEBER, Ralph, Gottfried (deceased). (72) Inventors; and (75) Inventors/Applicants (for US only): LEIGH, David, John [AU/AU]; 51 Hovea Terrace, Kensington, W.A. 6151 (AU). BURKE, Peter, Damian [AU/AU]; 10 Burney Court, Kardinya, W.A. 6163 (AU). BATES, Cecil, Peter [NZ/AU]; 12a Coogee Road, Mt. Pleasant, W.A. 6153 (AU). (74) Agent: GRIFFITH HACK; 509 St. Kilda Road, Melbourne, VIC 3004 (AU).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
<p>(54) Title: DIRECT SMELTING VESSEL AND DIRECT SMELTING PROCESS</p> <p>(57) Abstract</p> <p>A vessel which produces metal from a metalliferous feed material by a direct smelting process is disclosed. The vessel contains a molten bath having a metal layer (15) and a slag layer (16) on the metal layer and has a gas continuous space (31) above the slag layer. The vessel includes a hearth formed of refractory material having a base (3) and sides (55) in contact with the molten metal and side walls (5) which extend upwardly from the sides (55) of the hearth and are in contact with the slag layer and the gas continuous space. The side walls that contact the gas continuous space include water cooled panels (57) and a layer of slag on the panels. The vessel also includes one or more than one lance/tuyere (13) extending downwardly into the vessel and injecting an oxygen-containing gas into the vessel above the metal layer and a plurality of lances/tuyeres (11) injecting at least part of the metalliferous feed material and a carbonaceous material with a carrier gas into the molten bath so as to penetrate the metal layer.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DIRECT SMELTING VESSEL AND DIRECT SMELTING PROCESS

5       The present invention relates to a direct  
smelting vessel for producing molten metal (which term  
includes metal alloys) from a metalliferous feed material  
such as ores, partly reduced ores and metal-containing  
waste streams.

10       The present invention relates particularly to a  
vessel that can be used for molten bath-based direct  
smelting processes.

15       The present invention also relates to a direct  
smelting process that operates in the vessel.

20       The term "smelting" is understood herein to mean  
thermal processing wherein chemical reactions that reduce  
metalliferous feed material take place to produce liquid  
metal.

25       The term "direct smelting process" is understood  
herein to mean a process that produces a molten metal  
directly from a metalliferous feed material, such as iron  
ore and partly reduced iron ore.

30       There is a range of known vessels that has been  
developed to undertake molten bath-based direct smelting  
processes within a gas/liquid environment of a molten bath.

35       One known molten bath-based direct smelting  
process for producing molten iron from iron ore, which is  
generally referred to as the Romelt process, is based on  
the use of a large volume, highly agitated slag bath as the  
medium for smelting top-charged metal oxides to metal and  
for post-combusting gaseous reaction products and  
transferring the heat as required to continue smelting

metal oxides. The Romelt process includes injection of oxygen enriched air or oxygen into the slag via a lower row of tuyeres to provide slag agitation and injection of oxygen into the slag via an upper row of tuyeres to promote post-combustion. In the Romelt process the metal layer is not an important reaction medium.

Another known group of molten bath-based direct smelting processes for producing molten iron from iron ore that is also slag-based is generally described as "deep slag" processes. These processes, such as DIOS and AISI processes, are based on forming a deep layer of slag with 3 regions, namely: an upper region for post-combusting reaction gases with injected oxygen; a lower region for smelting metal oxides to metal; and an intermediate region which separates the upper and lower regions. As with the Romelt process, the metal layer below the slag layer is not an important reaction medium.

Another known bath-based direct smelting process for producing molten iron from iron ore, which relies on a molten metal layer as a reaction medium, and is generally referred to as the HIs melt process, is described in International application PCT/AU96/00197 (WO 96/31627) in the name of the applicant.

The HIs melt process as described in the International application comprises:

- (a) forming a bath of molten iron and slag in a vessel;
- (b) injecting into the bath:
  - (i) metalliferous feed material, typically metal oxides; and

- 3 -

(ii) a solid carbonaceous material, typically coal, which acts as a reductant of the metal oxides and a source of energy; and

5

(c) smelting the metalliferous feed material to metal in the metal layer.

The Hismelt process also comprises post-combusting reaction gases, such as CO and H<sub>2</sub>, released from the bath in the space above the bath with injected oxygen-containing gas and transferring the heat generated by the post-combustion to the bath to contribute to the thermal energy required to smelt the metalliferous feed materials.

15

The Hismelt process also comprises forming a transition zone above the nominal quiescent surface of the bath in which there is a favourable mass of ascending and thereafter descending droplets or splashes or streams of molten metal and/or slag which provide an effective medium to transfer to the bath the thermal energy generated by post-combusting reaction gases above the bath.

There are significant issues involved in constructing vessels that can contain the above-described direct smelting processes.

More particularly, for economic and safety reasons it is important that the vessels contain the direct smelting processes with minimal heat loss and be capable of withstanding the erosive/corrosive conditions that are a characteristic of the processes over long term operating campaigns.

Process containment must also be combined with means to inject and to mix reactants to form and maintain different zones in the vessels and to separate products of

35

the processes.

Process chemistry of direct smelting processes generally requires a region of low oxygen potential to smelt metalliferous feed material and a region of high oxygen potential to combust hydrogen and carbon monoxide to obtain combustion energy. As a consequence, typically, there are wide variations in temperature and chemical composition throughout the vessels that contain direct smelting processes which place different demands on the design of vessels.

Some planned and tested direct smelting vessels include an outer steel shell and an internal lining of a refractory material, typically in the form of bricks and/or castables. It is known to use bricks of different composition and physical properties in different sections of the vessels to maximise resistance to thermal and chemical attack and erosion.

For example, refractory bricks in the base of the vessels are usually exposed to molten material that is predominantly metal whereas the refractory bricks in the mid-section of the side walls of the vessels are usually exposed to molten material that is predominantly slag and to gaseous reactants such as  $\text{CO}$ ,  $\text{H}_2$ ,  $\text{CO}_2$ , and  $\text{H}_2\text{O}$ . The bricks exposed to molten metal and the bricks exposed to molten slag require different chemical properties to resist chemical attack by metal and slag.

Moreover, in the case of vessels that operate slag-based direct smelting processes, such as the Romelt, DIOS, and AISI process, typically the slag region is agitated and the metal region is relatively undisturbed (compared with the HIs melt process). As a consequence, the bricks exposed to the slag region require physical properties to resist erosion due to contact with agitated



slag.

Furthermore, in the case of vessels that operate metal bath-based direct smelting processes, such as the Hismelt process, typically the metal region is also agitated. As a consequence, the bricks exposed to this region require physical properties to resist erosion due to washing action of metal against the bricks.

Furthermore, in general terms, post-combustion of reaction gases generates high temperatures of the order of 2000°C or higher and, as a consequence, the bricks exposed to the top space/transition zone/slag region in which post-combustion occurs require physical and chemical properties to withstand high temperatures.

In practice, linings of refractory materials have not been an unqualified success for a number of developing direct smelting processes.

There have been proposals to enhance the performance of refractory material linings by water cooling the linings. One particular proposal is described in Australian patent application 692405 in the name of Steel Technology Corporation in the context of a vessel for carrying out the AISI deep slag process. There have also been a limited number of proposals to use water cooled panels in place of refractory materials. On the basis of information available to the applicant these proposals have resulted in excessive heat losses and have been unsuccessful on this basis.

An object of the present invention is to provide an improved direct smelting vessel.

Another object of the present invention is to provide an improved direct smelting process that operates

in the vessel.

The present invention achieves these objects by constructing a direct smelting vessel with water cooled  
5 panels in the side walls and the roof of the vessel and injection lances for oxygen-containing gas and injection lances for solids material extending into the vessel which make it possible to operate a direct smelting process in the vessel which builds-up and thereafter maintains on the  
10 water cooled panels a layer of slag which acts as an effective thermal insulation such that there are reduced heat losses from the vessel.

According to the present invention there is  
15 provided a vessel which produces metal from a metalliferous feed material by a direct smelting process, which vessel contains a molten bath having a metal layer and a slag layer on the metal layer and has a gas continuous space above the slag layer, which vessel includes:

20

(a) a hearth formed of refractory materiel having a base and sides in contact with the molten metal;

25

(b) side walls which extend upwardly from the sides of the hearth and are in contact with the slag layer and the gas continuous space, wherein the side walls that contact the gas continuous space include water cooled panels  
30 and a layer of slag on the panels;

30

(c) one or more than one lance/tuyere extending downwardly into the vessel and injecting an oxygen-containing gas into the vessel above  
35 the metal layer;

35

(d) a plurality of lances/tuyeres injecting at



least part of the metalliferous feed material and a carbonaceous material with a carrier gas into the molten bath so as to penetrate the metal layer; and

5

(e) a means for tapping molten metal and slag from the vessel.

10 Preferably the direct smelting process operates with heat losses of less than 150 kW/m<sup>2</sup> of exposed panel area of the water cooled panels under normal operating conditions.

15 The term "normal operating conditions" is understood herein to mean periods when the process is stable and excludes periods where there are likely to be high peak flux loads, such as during start-up.

20 Preferably, the direct smelting process operates with heat losses of less than 100 kW/m<sup>2</sup> of exposed panel area of the water cooled panels under normal operating conditions.

25 More preferably the direct smelting process operates with heat losses of less than 90 kW/m<sup>2</sup> of exposed panel area of the water cooled panels under normal operating conditions.

30 The water cooled panels may be of any suitable configuration.

35 One preferred construction of water cooled panel includes an inner (in relation to the inside of the vessel) water cooling pipe that has a serpentine shape, a water inlet at one end, and a water outlet at the other end.

Preferably the panel further includes an outer

water cooling pipe that has a serpentine shape, a water inlet at one end, and a water outlet at the other end.

5 In one alternative construction the inner and outer water cooling pipes of a panel are interconnected and include a single inlet and a single outlet.

10 Preferably the panel further includes a refractory material rammed or gunned in the spaces of the panel that are not occupied by the pipes. It is believed that in practice this refractory material is worn away progressively during the life of the vessel, with the start-up phase and process perturbations of the direct smelting process causing the most significant wear. The  
15 erosion of the rammed or gunned refractory material can cause at least partial exposure of the inner water cooling pipe.

20 Preferably the rammed or gunned refractory material forms an inner surface of the panel.

The panel may include a support plate which forms an outwardly facing surface of the panel.

25 The water cooling pipes and the support plate may be constructed from any suitable materials. Suitable materials for the pipes include steel and copper. Steel is an example of a suitable material for the support plate.

30 Preferably each water cooling pipe includes parallel, horizontal sections that extend across the width of the panel and interconnect curved sections at the ends of the straight sections.

35 Preferably the outer water cooling pipe is displaced from the inner water cooling pipe so that the horizontal sections of the outer water cooling pipe are not

immediately behind the horizontal sections of the inner water cooling pipe. As a consequence, at least a substantial part of an inner surface of the panel that is exposed to the inside of the vessel is subject to water cooling by water flowing through the inner and outer pipes.

Preferably the inner exposed surface of the panel includes a surface finish, such as a ripple or waffle surface, that increases the exposed surface area of the panel and promotes attachment of frozen slag onto the face.

Preferably the panel includes members, such as pins and cups, which project inwardly from the exposed face of the panel and promote formation and growth of frozen slag on the panel and assist the slag to key to the panel.

Preferably the side walls that contact the slag layer include water cooled panels, a lining of refractory and a layer of slag on the lining.

Preferably the refractory lining is formed from the refractory bricks.

Preferably the vessel contains a transition zone formed by ascending and thereafter descending splashes, droplets and streams of molten material in the gas continuous space above the slag layer with some of these splashes, droplets and streams being contiguous with the side walls of the vessel and depositing molten slag on the side walls.

Preferably the water cooled panels contact the transition zone.

Preferably heat extraction via the water cooled panels is sufficient to build-up and maintain a layer of slag on the water cooled panels that contact the transition

zone.

Preferably splashes, droplets and streams of molten material extend above the transition zone and  
5 contact the side walls of the vessel above the transition zone.

More preferably heat extraction via the water cooled panels is sufficient to build-up and maintain a  
10 layer of slag on the panels that are above the transition zone.

Preferably, the vessel includes a roof that is in contact with the gas continuous space and includes water  
15 cooled panels.

Preferably splashes, droplets and streams of molten material extend above the transition zone and contact the roof.  
20

More preferably the heat extraction via the water cooled panels is sufficient to build up and maintain a layer of slag on the panels.

25 The slag may form as a "wet" layer or a "dry" layer on the water cooled panels. A "wet" layer includes a frozen layer that adheres to the inner surface of the panels, a semi-solid (mush) layer, and an outer liquid film. A "dry" layer is one in which substantially all of  
30 the slag is frozen.

Preferably the base and sides of the hearth include a lining of refractory material in contact with the molten bath.  
35

Preferably the refractory lining is formed from refractory bricks.

Preferably the solid material injection lances/tuyeres extend downwardly and inwardly into the vessel at an angle of 30-60°.

5

Preferably the ends of the solid material injection lances/tuyeres are above the level of the molten metal.

10

Preferably injection of solid material via the solid material lances/tuyeres causes upward movement of splashes, droplets and streams of molten material into the gas continuous space.

15

Preferably the one or more than one lance/tuyere which inject the oxygen-containing gas is positioned to inject the oxygen-containing gas into the transition zone to post-combust reaction gases carbon monoxide and hydrogen in the transition zone.

20

Preferably the tapping means includes a forehearth which enables continuous discharge of molten metal from the vessel.

25

According to the present invention there is also provided a direct smelting process for producing metals from a metalliferous feed material in the vessel described in the preceding paragraphs, which process includes the steps of:

30

(a) forming a molten bath having a metal layer and a slag layer on the metal layer;

35

(b) injecting at least part of the metalliferous feed material and a solid carbonaceous material with a carrier gas into the molten bath via a plurality of lances/tuyeres and

5 smelting the metalliferous material in the  
metal layer, whereby the solids injection  
causes gas flow from the metal layer which  
entrains molten material in the metal layer  
and carries the molten material upwardly as  
splashes, droplets and streams and forms a  
transition zone in a gas continuous space in  
the vessel above the slag layer, whereby  
10 splashes, droplets and streams of molten  
material contact the side walls of the  
vessel and form a protective layer of slag;

15 (c) injecting an oxygen-containing gas into the  
vessel via one or more than one lance/tuyere  
and post-combusting reaction gases released  
from the molten bath whereby ascending and  
thereafter descending splashes, droplets and  
streams of molten material facilitate heat  
transfer to the molten bath; and

20 (d) controlling solid injection and/or oxygen-  
containing gas injection and/or water flow  
rate through the water cooled panels so that  
the heat loss via the water cooled panels is  
25 less than  $150 \text{ kW/m}^2$  of panel area exposed to  
the inside of the vessel under normal  
operating conditions.

30 Preferably the heat loss via the water cooled  
panels is less than  $100 \text{ kW/m}^2$  of panel area exposed to the  
inside of the vessel under normal operating conditions.

35 More preferably the heat loss via the water  
cooled panels is less than  $90 \text{ kW/m}^2$  of panel area exposed  
to the inside of the vessel under normal operating  
conditions.



The present invention is described further by way of example with reference to the accompanying drawings of which:

5           Figure 1 is a vertical section through a metallurgical vessel illustrating in schematic form a preferred embodiment of the present invention;

10           Figure 2 is a more detailed view of the left side of the vessel shown in Figure 1; and

15           Figure 3 is a front elevation illustrating the arrangement of water cooling pipes of a number of water cooled panels in the cylindrical barrel of the vessel shown in Figures 1 and 2.

20           The following description is in the context of direct smelting iron ore to produce molten iron and it is understood that the present invention is not limited to this application and is applicable to any suitable metallic ores and concentrates and other metalliferous feed material - including partially reduced metallic ores and metal containing waste streams.

25           The vessel shown in the figures has a hearth that includes a base 3 and sides 55 formed from refractory bricks; side walls 5 which form a generally cylindrical barrel extending upwardly from the sides 55 of the hearth and which include an upper barrel section 51 and a lower barrel section 53; a roof 7; an outlet 9 for off-gases; a forehearth 57 for discharging molten metal continuously; 30           and a tap-hole 61 for discharging molten slag periodically.

35           In use, the vessel contains a molten bath of iron and slag which includes a layer 15 of molten metal and a layer 16 of molten slag on the metal layer 15. The arrow marked by the numeral 17 indicates the position of

- 14 -

quiescent surface of the metal layer 15 and the arrow marked by the numeral 19 indicates the position of the quiescent surface of the slag layer 16. The term "quiescent surface" is understood to mean the surface when there is no injection of gas and solids into the vessel.

The vessel also includes 2 solids injection lances/tuyeres 11 extending downwardly and inwardly at an angle of 30°-60° to the vertical through the side walls 5 and into the slag layer 16. The position of the lances/tuyeres 11 is selected so that the lower ends are above the quiescent surface 17 of the metal layer 15.

In use, iron ore (typically fines), solid carbonaceous material (typically coal), and fluxes (typically lime and magnesia) entrained in a carrier gas (typically N<sub>2</sub>) are injected into the metal layer 15 via the lances/tuyeres 11. The momentum of the solid material/carrier gas causes the solid material and the carrier gas to penetrate the metal layer 15. The coal is devolatilised and thereby produces gas in the metal layer 15. Carbon partially dissolves into the metal and partially remains as solid carbon. The iron ore is smelted to metal and the smelting reaction generates carbon monoxide gas. The gases transported into the metal layer 15 and generated via devolatilisation and smelting produce significant buoyancy uplift of molten metal, solid carbon, and slag (drawn into the metal layer 15 as a consequence of solid/gas/injection) from the metal layer 15 which generates an upward movement of splashes, droplets and streams of molten metal and slag, and these splashes, droplets, and streams entrain slag as they move through the slag layer 16.

The buoyancy uplift of molten metal, solid carbon and slag causes substantial agitation in the metal layer 15 and the slag layer 16, with the result that the slag layer

- 15 -

16 expands in volume and has a surface indicated by the arrow 30. The extent of agitation is such that there is reasonably uniform temperature in the metal and the slag regions - typically, 1450-1550°C with a temperature  
5 variation of not more than 30°C in each region.

In addition, the upward movement of splashes, droplets and streams of molten material - caused by the buoyancy uplift of molten metal, solid carbon, and slag -  
10 extends into the space 31 (the "top space") above the molten bath in the vessel and:

- (a) forms a transition zone 23; and
- 15 (b) projects some molten material (predominantly slag) beyond the transition zone and onto the part of the upper barrel section 51 of the side walls 5 that is above the transition zone 23 and onto the roof 7.

20 In general terms, the slag layer 16 is a liquid continuous volume, with gas bubbles therein, and the transition zone 23 is a gas continuous volume with splashes, droplets, and streams of molten material  
25 (predominantly slag).

The vessel further includes a lance 13 for injecting an oxygen-containing gas (typically pre-heated oxygen enriched air) which is centrally located and extends  
30 vertically downwardly into the vessel. The position of the lance 13 and the gas flow rate through the lance 13 are selected so that the oxygen-containing gas penetrates the central region of the transition zone 23 and maintains an essentially metal/slag free space 25 around the end of the  
35 lance 13.

The injection of the oxygen-containing gas via

the lance 13 post-combusts reaction gases CO and H<sub>2</sub> in the transition zone 23 and in the free space 25 around the end of the lance 13 and generates high temperatures of the order of 2000°C or higher in the gas space. The heat is transferred to the ascending and descending splashes, droplets, and streams of molten material in the region of gas injection and the heat is then partially transferred to the metal layer 15 when the metal/slag returns to the metal layer 15.

10

The free space 25 is important to achieving high levels of post combustion because it enables entrainment of gases in the top space above the transition zone 23 into the end region of the lance 13 and thereby increases exposure of available reaction gases to post combustion.

15

The combined effect of the position of the lance 13, gas flow rate through the lance 13, and upward movement of splashes, droplets and streams of molten material is to shape the transition zone 23 around the lower region of the lance 13 - generally identified by the numerals 27. This shaped region provides a partial barrier to heat transfer by radiation to the side walls 5.

20

Moreover, the ascending and descending droplets, splashes and streams of molten material is an effective means of transferring heat from the transition zone 23 to the molten bath with the result that the temperature of the transition zone 23 in the region of the side walls 5 is of the order of 1450°C-1550°C.

25

30

In accordance with a preferred embodiment of the present invention the vessel is constructed with reference to the levels of the metal layer 15, the slag layer 16, and the transition zone 23 in the vessel when the process is operating under normal operating conditions and with reference to splashes, droplets and streams of molten

35

- 17 -

material (predominantly slag) that are projected into the top space 31 above the transition zone 23 when the process is operating, so that:

- 5 (a) the hearth and the lower barrel section 53 of the side walls 5 that contact the metal/slag layers 15/16 are formed from bricks of refractory material (indicated by the cross-hatching in the figure) which contact directly the metal and slag in these layers;
- 10
- (b) at least part of the lower barrel section 53 of the side walls 5 is backed by water cooled panels 8; and
- 15
- (c) the part of the upper barrel section 51 of the side walls 5 that contact the transition zone 23, the remainder of the upper barrel section 51 that is above the transition zone 23, and the roof 7 are formed from water cooled panels 57, 59.
- 20

25 Each water cooled panel 8, 57, 59 (not shown) in the upper barrel section 51 of the side walls 5 has parallel upper and lower edges and parallel side edges and is curved so as to define a section of the cylindrical barrel. As can best be seen in Figures 2 and 3, each panel

30 57,59 includes an inner water cooling pipe 63 and an outer water cooling pipe 65. The pipes 63,65 are formed into a serpentine configuration with parallel horizontal sections interconnected by curved sections. The pipes 63,65 further include water inlets/water outlets 69. The pipes 63,65 are

35 displaced vertically so that the horizontal sections of the outer pipe 65 are not immediately behind the horizontal sections of the inner pipe 63 when viewed from an exposed

face of the panel, ie the face that is exposed to the interior of the vessel. Each panel 63,65 further includes a rammed or gunned refractory material which fills the spaces between the adjacent horizontal sections of each pipe 63,65 and between the pipes 63,65 and forms an inner face of the panel. Each panel further includes a support plate 67 which forms an outer surface of the panel.

The water inlets/water outlets 69 of the pipes are connected to a water supply circuit (not shown) which circulates water at high flow rate through the pipes.

In use, the water flow rate through the water cooled panels 57, 59, the solids/carrier gas flow rate via the lances/tuyeres 11, and the oxygen-containing gas flow rate via the lance 13 are controlled so that there is sufficient slag contacting the panels and sufficient heat extraction from the panels to build-up and maintain a layer of frozen slag on the panels. The slag layer forms an effective thermal barrier which thereafter minimises heat loss to below 150 kW/m<sup>2</sup> from the side walls 5 and the roof 7 of the vessel under normal operating conditions of the process.

In extensive pilot plant work carried out by the applicant the applicant has recorded significantly lower heat losses than have been reported with other vessels.

The pilot plant work referred to above was carried out as a series of extended campaigns by the applicant at its pilot plant at Kwinana, Western Australia.

The pilot plant work was carried out with the vessel shown in the figure and described above and in accordance with the process conditions described above.

The pilot plant work evaluated the vessel and



investigated the process under a wide range of different:

- (a) feed materials;
- 5 (b) solids and gas injection rates;
- (c) slag:metal ratios;
- (d) operating temperatures; and
- 10 (e) apparatus set-ups.

Table 1 below sets out relevant data during  
typical start-up and stable operating conditions of the  
15 pilot plant work.

		START UP	STABLE OPERATION
Bath Temperature	(°C)	1450	1450
Operating Pressure	(bar g)	0.5	0.5
HAB Air	(kNm <sup>3</sup> /h)	26.0	26.0
Oxygen in HAB	(%)	20.5	20.5
HAB Temperature	(C)	1200	1200
DSO Ore	(t/h)	5.9	9.7
Coal	(t/h)	5.4	6.1
Calcined Flux	(t/h)	1.0	1.4
Ore Feed Temp	(C)	25.0	25.0
Hot Metal	(t/h)	3.7	6.1
Slag	(t/h)	2.0	2.7
Post Combustion	(%)	60.0	60.0
Offgas Temperature	(C)	1450	1450
Heat Transfer to Bath	(MW)	11.8	17.3
Heat Loss to Panels	(MW)	12.0	8.0
Coal Rate	(kg/thm)	1453	1003

The iron ore was a normal fine direct shipping

ore and contained 64.6% iron, 4.21%  $\text{SiO}_2$ , and 2.78%  $\text{Al}_2\text{O}_3$  on a dry basis.

5 An anthracite coal was used both as a reductant and a source of carbon and hydrogen to combust and supply energy to the process. The coal had a calorific value of 30.7 MJ/kg, an ash content of 10%, and a volatile level of 9.5%. Other characteristics included 79.82% total carbon, 1.8%  $\text{H}_2\text{O}$ , 1.59%  $\text{N}_2$ , 3.09%  $\text{O}_2$ , and 3.09%  $\text{H}_2$ .

10

The process was operated to maintain a slag basicity of 1.3 ( $\text{CaO}/\text{SiO}_2$  ratio) using a combination of fluxes of lime and magnesia. The magnesia contributed  $\text{MgO}$  thereby reducing the corrosiveness of the slag to the refractory by maintaining appropriate levels of  $\text{MgO}$  in the slag.

15

Under start-up conditions the pilot plant operated with: a hot air blast rate of 26,000  $\text{Nm}^3/\text{h}$  at 1200°C; a post combustion rate of 60% ( $(\text{CO}_2 + \text{H}_2\text{O}) / (\text{CO} + \text{H}_2 + \text{CO}_2 + \text{H}_2\text{O})$ ); and a feed rate of iron ore fines of 5.9 t/h, a feed rate of coal of 5.4 t/h and a feed rate of flux of 1.0 t/h, all injected as solids using  $\text{N}_2$  as a carrier gas. There was little or no slag in the vessel and there was not sufficient opportunity to form a frozen slag layer on the side panels. As a consequence, the cooling water heat loss was relatively high at 12 MW. The pilot plant operated at a production rate of 3.7 t/h of hot metal (4.5 wt%C) and a coal rate of 1450 kg coal/t hot metal produced.

25

30

Under stable operating conditions, with control of slag inventory and a frozen slag layer on the water cooling panels forming the side walls 5 and the roof 7, relatively low total water cooling heat losses of 8 MW were recorded. It is noted that this total water cooling heat loss is the sum of water cooling heat losses from the water cooled panels of the side walls 5 and the roof 7 and also

35

- 21 -

from other water cooled components of the vessel, such as the lances/tuyeres 11 and the lance 13. This total water cooling heat loss equates to less than 150 kW/m<sup>2</sup> of exposed panel surface of the side walls 5 and the roof 7. The reduction of the heat lost to the water cooling system allowed an increased productivity to 6.1 t/h of hot metal. The increased productivity was obtained at the same hot air blast rate and post combustion as at start-up. Solid injection rates were 9.7 t/h of ore fines and 6.1 t/h of coal along with 1.4 t/h of flux. The improved productivity also improved the coal rate to 1000 kg coal/t hot metal achieved.

The initial design of the water cooling panels for the side walls 5 and the roof 7 of the pilot plant vessel were based on experience from EAF and EOF furnace operation. The design heat flux figures were:

Roof:	230 kW/m <sup>2</sup>
Upper barrel:	230 kW/m <sup>2</sup>
Lower barrel:	290 kW/m <sup>2</sup>

The cooling water circuits were designed with a maximum flow rate to achieve a heat flux of 350 kW/m<sup>2</sup>.

It was expected prior to commencing pilot plant trials that the water cooling panels that were exposed directly to the interior of the vessel - ie that were not brick lined - would have heat losses of around 250 kW/m<sup>2</sup>. However, under stable operating conditions the heat losses were unexpectedly low - as low as 85 and 65 kW/m<sup>2</sup> - particularly on the exposed water cooling panels forming the upper barrel 51 above the transition zone 23 and the roof 7. In the early campaigns where there was minimal wear of the rammed or gunned refractory material of the panels, the heat losses ranged from and averaged:

- 22 -

Roof:	80-170	120 kW/m <sup>2</sup>
Upper Barrel:	60-165	95 kW/m <sup>2</sup>
Lower Barrel:	40-160	70 kW/m <sup>2</sup>

5           The panels in the lower barrel 53 were partly  
protected by refractory bricks.

          A similar set of data was obtained from a later  
campaign. The following data from this campaign reflects  
10 the impact of increased wear of the rammed or gunned  
refractory material of the water cooling panels:

Roof:	80-245	145 kW/m <sup>2</sup>
Upper Barrel:	75-180	130 kW/m <sup>2</sup>
15 Lower Barrel:	50-170	110 kW/m <sup>2</sup>

          Many modifications may be made to the preferred  
embodiment of the vessel described above without departing  
from the spirit and scope of the present invention.

## CLAIMS:

1. A vessel which produces metal from a metalliferous feed material by a direct smelting process, which vessel contains a molten bath having a metal layer and a slag layer on the metal layer and has a gas continuous space above the slag layer, which vessel includes:
- 10 (a) a hearth formed of refractory material having a base and sides in contact with the molten metal;
- 15 (b) side walls which extend upwardly from the sides of the hearth and are in contact with the slag layer and the gas continuous space, wherein the side walls that contact the gas continuous space include water cooled panels and a layer of slag on the panels;
- 20 (c) one or more than one lance/tuyere extending downwardly into the vessel and injecting an oxygen-containing gas into the vessel above the metal layer;
- 25 (d) a plurality of lances/tuyeres injecting at least part of the metalliferous feed material and a carbonaceous material with a carrier gas into the molten bath so as to
- 30 penetrate the metal layer; and
- (e) a means for tapping molten metal and slag from the vessel.
- 35 2. The vessel defined in claim 1 further includes a roof that is in contact with the gas continuous space and the roof includes water cooled panels and a layer

of slag on the panels.

3. The vessel defined in claim 1 or claim 2 wherein each water cooled panel includes an inner (in  
5 relation to the inside of the vessel) water cooling pipe that has a serpentine shape, a water inlet at one end, and a water outlet at the other end.

4. The vessel defined in claim 3 wherein each  
10 water cooled panel further includes an outer water cooling pipe that has a serpentine shape, a water inlet at one end, and a water outlet at the other end.

5. The vessel defined in claim 4 wherein each  
15 water cooled panel further includes a refractory material rammed or gunned in the spaces of the panel that are not occupied by the pipes.

6. The vessel defined in claim 4 or claim 5  
20 wherein each of the inner and the outer water cooling pipes includes parallel, horizontal sections that extend across the width of the panel and curved sections that interconnect the ends of the horizontal sections.

7. The vessel defined in claim 6 wherein the  
25 outer water cooling pipe is displaced from the inner water cooling pipe so that the horizontal sections of the outer water cooling pipe are not immediately behind the horizontal sections of the inner water cooling pipe.

8. The vessel defined in any one of the  
30 preceding claims wherein an inner (in relation to the inside of the vessel) exposed surface of each water cooling panel includes a surface finish, such as a ripple or waffle surface, that increases the exposed surface area of the  
35 panel and promotes attachment of frozen slag onto the surface.



- 25 -

9. The vessel defined in any one of the preceding claims wherein each water cooling panel includes members, such as pins and cups, which project inwardly from an inner exposed face of the panel and promote formation and growth of frozen slag on the panel.

10. The vessel defined in any one of the preceding claims wherein at least a section of the side walls that contact the slag layer include water cooled panels, a lining of refractory material positioned inwardly of the panels, and a layer of slag on the lining.

11. The vessel defined in any one of the preceding claims contains a transition zone formed by ascending and thereafter descending splashes, droplets and streams of molten material in the gas continuous space above the slag layer with some of these splashes, droplets and streams being contiguous with the side walls of the vessel and deposit molten slag on the side walls.

12. The vessel defined in claim 11 wherein the side walls include water cooled panels that contact the transition zone.

13. The vessel defined in claim 12 wherein heat extraction via the water cooled panels is sufficient to build-up and maintain a layer of slag on the water cooled panels that contact the transition zone.

14. The vessel defined in any one of claims 11 to 13 wherein the side walls include water cooled panels that are above the transition zone.

15. The vessel defined in claim 14 wherein heat extraction via the water cooled panels is sufficient to build-up and maintain a layer of slag on the panels that

are above the transition zone.

16. The vessel defined in any one of the preceding claims wherein the solid material injection lances/tuyeres extend downwardly and inwardly into the vessel at an angle of 30-60° to the vertical.

17. The vessel defined in any one of the preceding claims wherein lower ends of the solid material injection lances/tuyeres are above the level of the molten metal.

18. The vessel defined in any one of claims 11 to 15 wherein injection of solid material via the solid material injection lances/tuyeres causes upward movement of splashes, droplets and streams of molten material into the gas continuous space.

19. The vessel defined in any one of claims 11 to 15 and 18 wherein the one or more than one lance/tuyere which inject the oxygen-containing gas is positioned to inject the oxygen-containing gas into the transition zone to post-combust reaction gases carbon monoxide and hydrogen in the transition zone.

20. The vessel defined in any one of the preceding claims wherein the tapping means includes a forehearth which enables continuous discharge of molten metal from the vessel.

21. A direct smelting process for producing metals from a metalliferous feed material in the vessel defined in any one of the preceding claims, which process includes the steps of:

- (a) forming a molten bath having a metal layer and a slag layer on the metal layer;

- 5 (b) injecting at least part of the metalliferous  
feed material and a solid carbonaceous  
material with a carrier gas into the molten  
bath via a plurality of lances/tuyeres and  
smelting the metalliferous material in the  
metal layer, whereby the solids injection  
causes gas flow from the metal layer which  
entrains molten material in the metal layer  
10 and carries the molten material upwardly as  
splashes, droplets and streams and forms a  
transition zone in a gas continuous space in  
the vessel above the slag layer, whereby  
splashes, droplets and streams of molten  
15 material contact the side walls of the  
vessel and form a protective layer of slag;
- 20 (c) injecting an oxygen-containing gas into the  
vessel via one or more than one lance/tuyere  
and post-combusting reaction gases released  
from the molten bath whereby ascending and  
thereafter descending splashes, droplets and  
streams of molten material facilitate heat  
transfer to the molten bath; and
- 25 (d) controlling solids injection and/or oxygen-  
containing gas injection and/or water flow  
rate through the water cooled panels so that  
the heat loss via the water cooled panels is  
30 less than  $150 \text{ kW/m}^2$  of panel area exposed to  
the inside of the vessel under normal  
operating conditions.

35 22. The process defined in claim 21 wherein the  
heat loss via the water cooled panels is less than  $100 \text{ kW/m}^2$  of panel area exposed to the inside of the vessel  
under normal operating conditions.

23. The process defined in claim 22 wherein the  
heat loss via the water cooled panels is less than  $90 \text{ kW/m}^2$   
5 of panel area exposed to the inside of the vessel under  
( normal operating conditions.


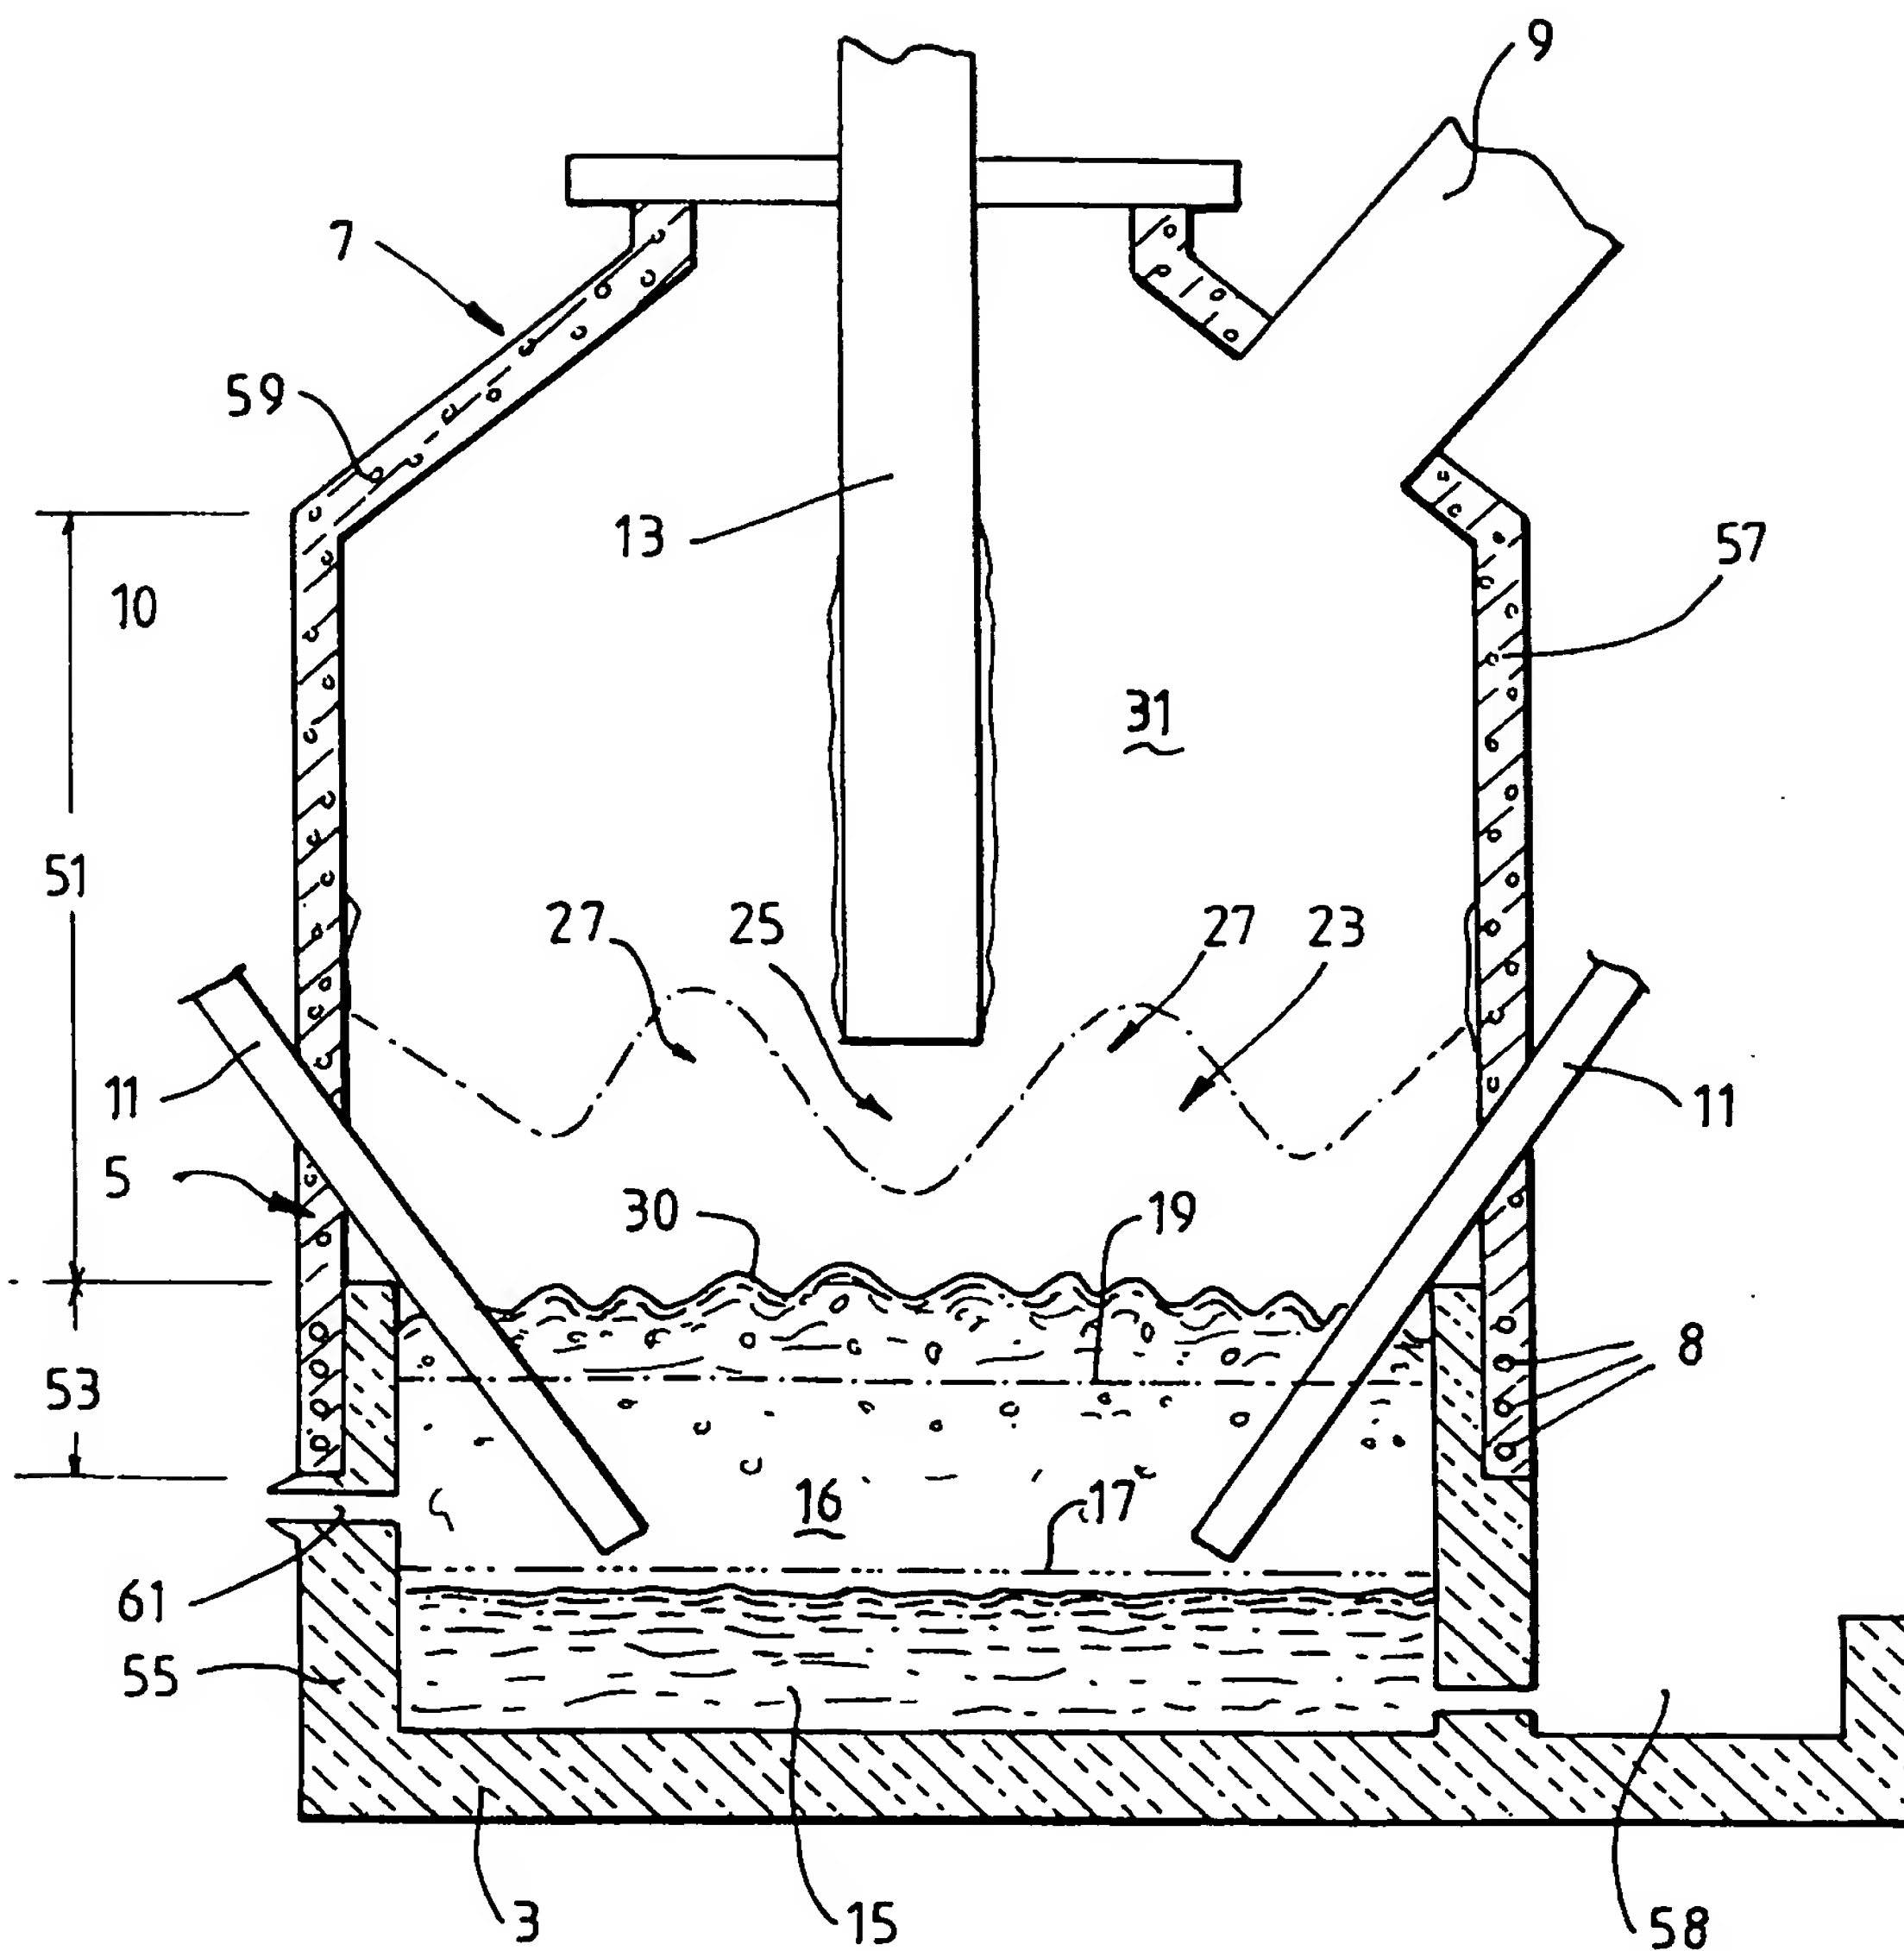



FIG. 1.



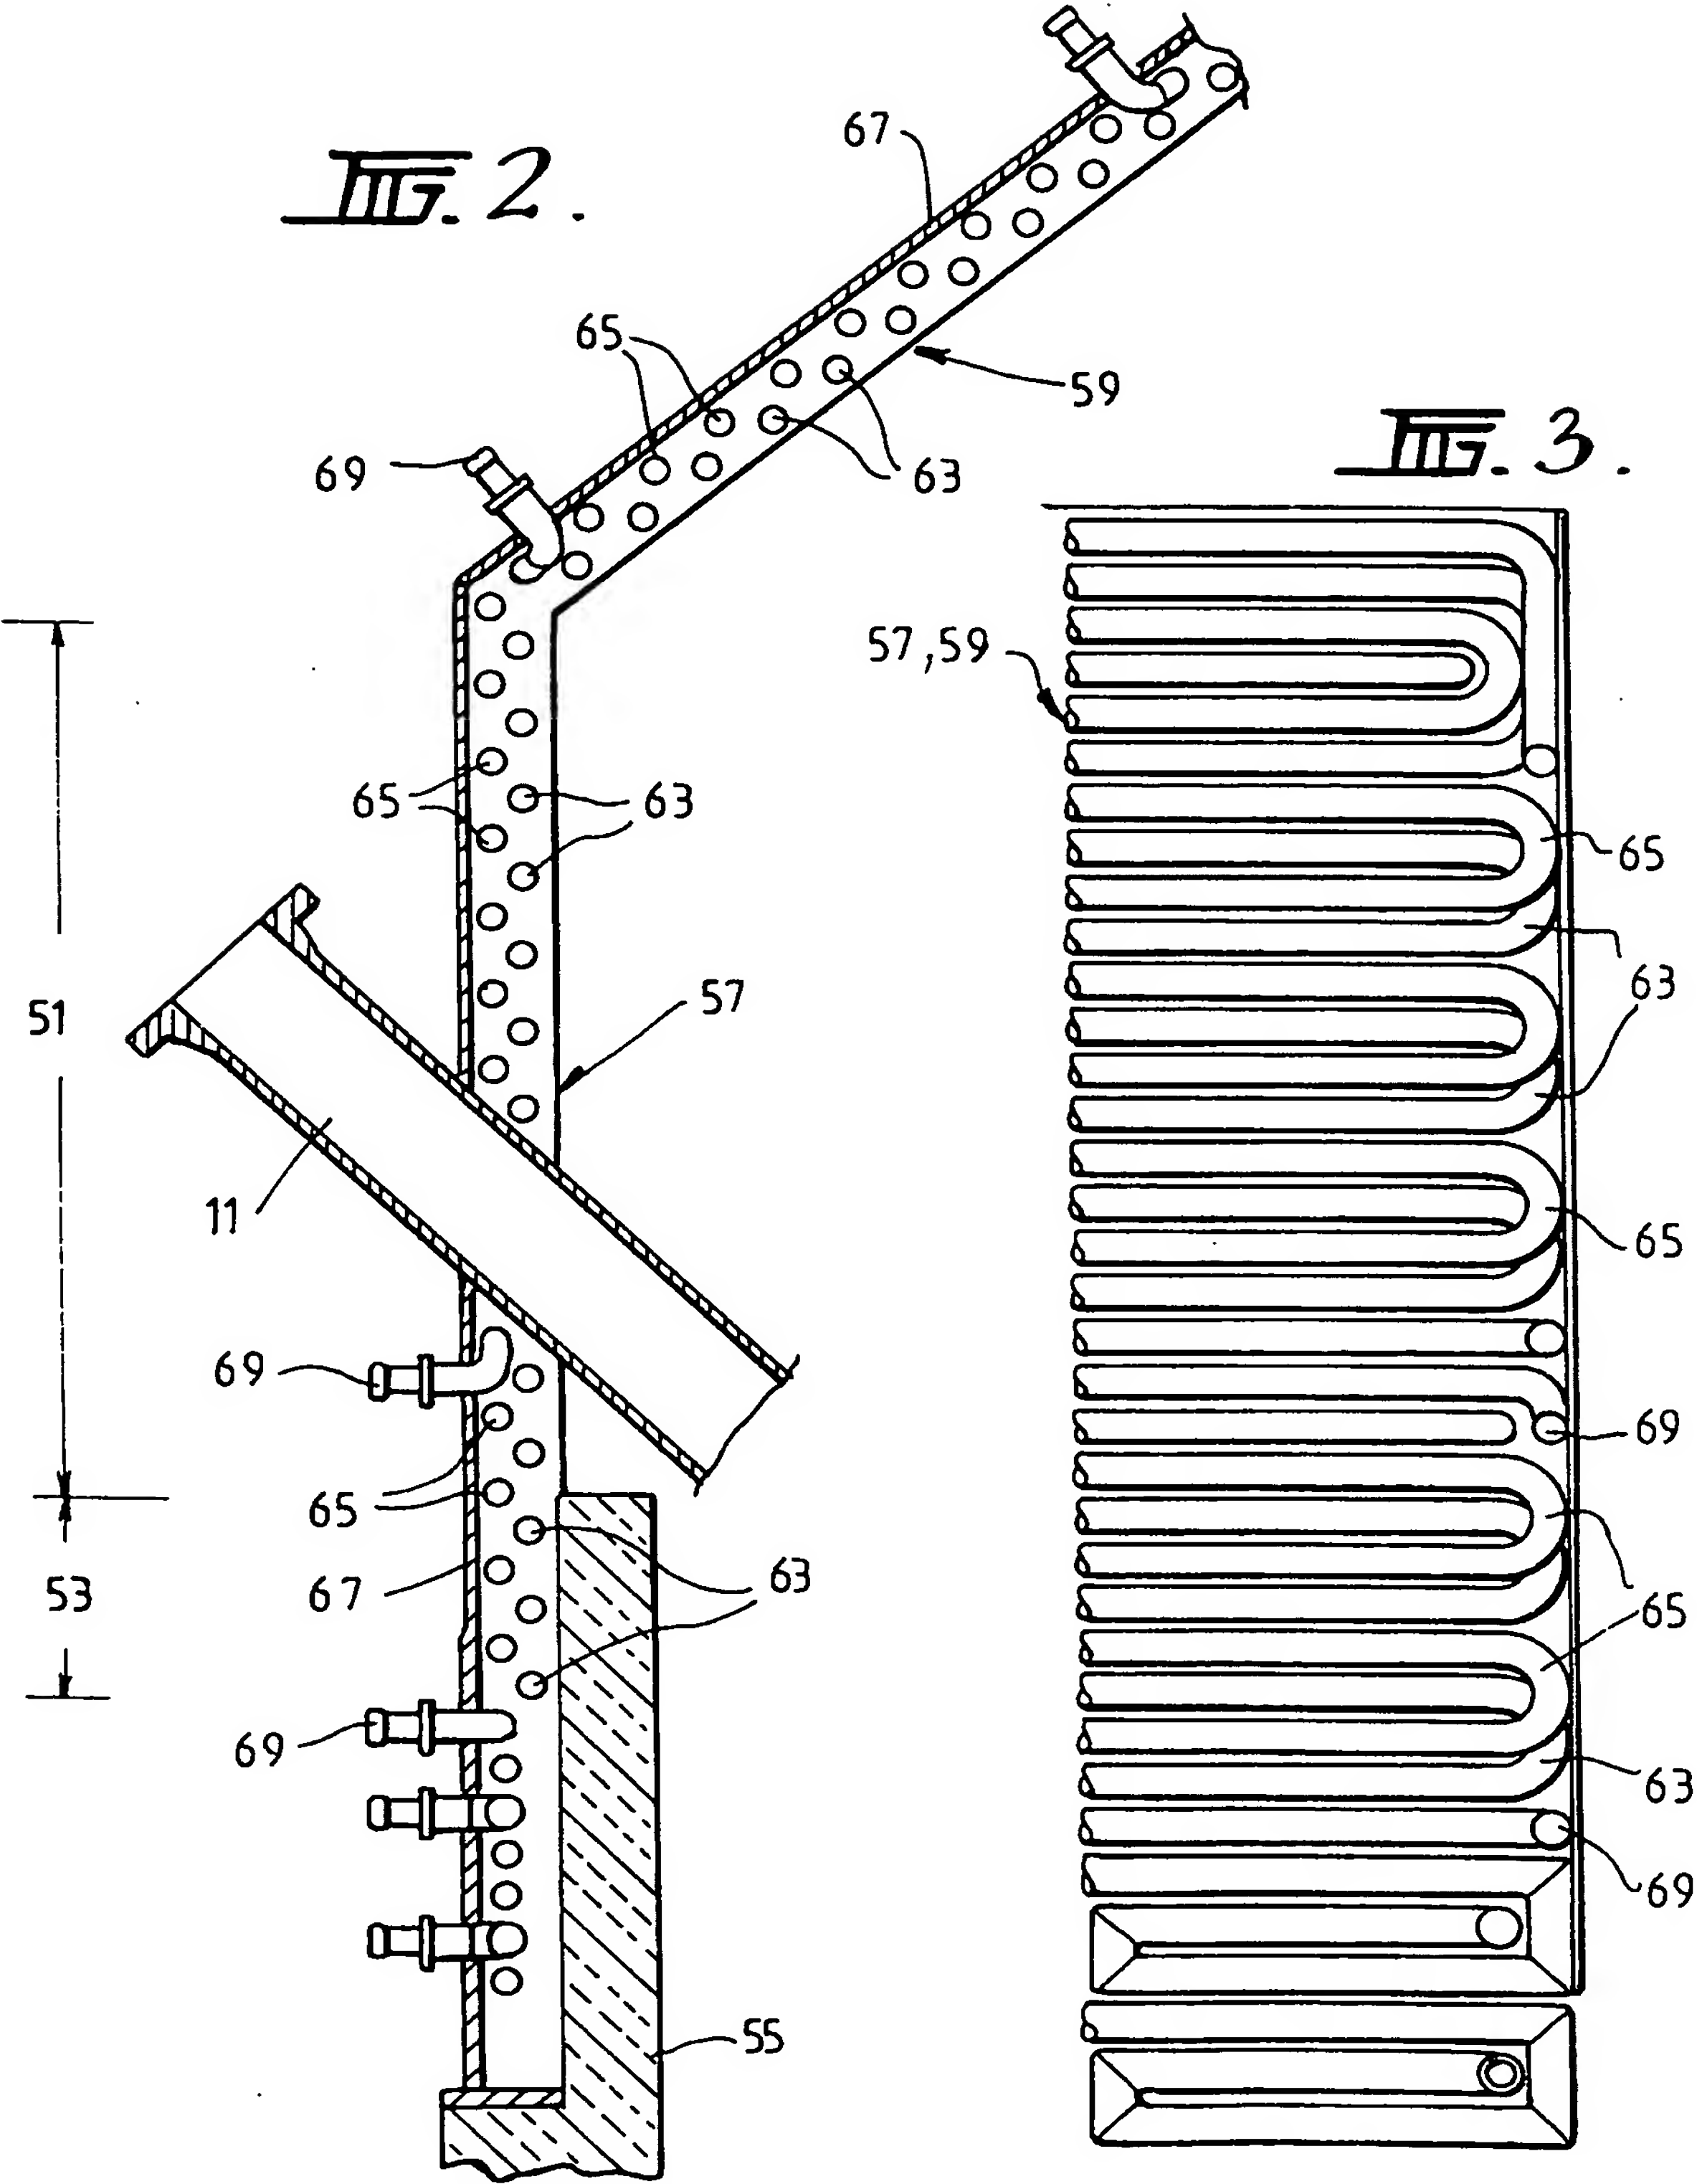

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU 99/00537
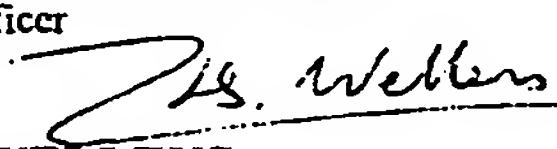
<b>A. CLASSIFICATION OF SUBJECT MATTER</b>																						
Int Cl <sup>6</sup> : C21B 11/00, 11/08, 13/00, 13/10, C22B 5/00																						
According to International Patent Classification (IPC) or to both national classification and IPC																						
<b>B. FIELDS SEARCHED</b>																						
Minimum documentation searched (classification system followed by classification symbols) IPC <sup>6</sup> As above																						
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU: IPC As above																						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Derwent On-line IPC <sup>6</sup> As above and Keywords lanc: tuyere: blow: top: above down: cool: water.																						
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>																						
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																				
X	WO, A, 94/19497 (A. Ahlstrom Corporation), 1 September 1994 Page 1, lines 3-15, 30-39; page 2; page 3; Claims 1, 6; Figure.	1-23																				
Y	WO, A, 96/31627 (Technological Resources Pty. Ltd), 10 October 1996 Page 1, lines 8-22; page 6, lines 7-24; Claims 1, 13; Fig 1, 2.	1-23																				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex																						
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A"</td> <td>document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T"</td> <td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E"</td> <td>earlier application or patent but published on or after the international filing date</td> <td>"X"</td> <td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L"</td> <td>document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y"</td> <td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O"</td> <td>document referring to an oral disclosure, use, exhibition or other means</td> <td>"&amp;"</td> <td>document member of the same patent family</td> </tr> <tr> <td>"P"</td> <td>document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family	"P"	document published prior to the international filing date but later than the priority date claimed		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																			
"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family																			
"P"	document published prior to the international filing date but later than the priority date claimed																					
Date of the actual completion of the international search 26 July 1999		Date of mailing of the international search report - 2 AUG 1999																				
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (02) 6285 3929		Authorized officer  MR KIM WELLENS Telephone No.: (02) 6283 2162																				

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU 99/00537

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, Y	Patent Abstracts of Japan, JP, A, 10-280020 (Nippon Steel Corp.), 20 October 1998 Whole Document	1-23
Y	Patent Abstracts of Japan, C-951, page 24, JP, A, 04-63218 (Kawasaki Heavy Ind. Ltd), 28 February 1992 Whole Document	1-23
Y	Patent Abstracts of Japan, C-627, page 109, JP, A, 01-127613 (Kawasaki Steel Corp.) 19 May 1989 Whole Document	1-23

## INTERNATIONAL SEARCH REPORT

### Information on patent family members

International application No.  
PCT/AU 99/00537

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member				
<u>WO</u>	<u>94/19497</u>	AU	58854/94	CA	2156631	CN	1121358
		EP	686204	FI	93027	JP	8506858
		ZA	9400772				
<u>WO</u>	<u>96/31627</u>	AU	51381/96	BR	9604837	CA	2217353
		CN	1181112	EP	819182	JP	11503200
		ZA	9602795				
<u>JP</u>	<u>10280020</u>	NONE					
<u>JP</u>	<u>04063218</u>	NONE					
<u>JP</u>	<u>01127613</u>	NONE					
							END OF ANNEX